



Piloted Reamer

Date: _____ PO #: _____
 Distributor: _____ Location: _____
 Contact: _____ Phone: _____
 Email: _____ Fax: _____
 # of Pieces: _____ Hardness: _____
 Material : _____

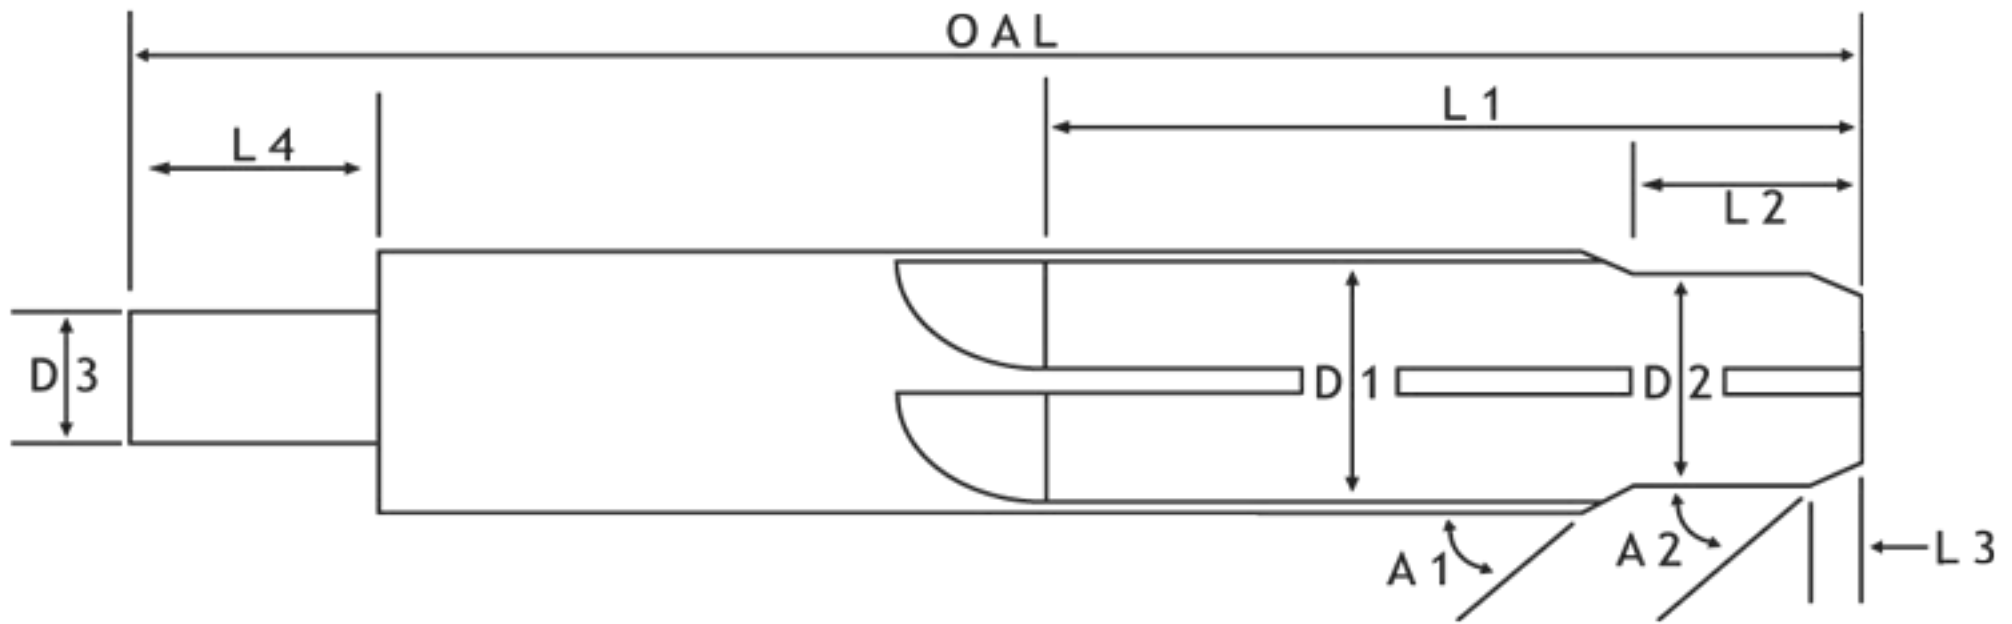

** CHECK HERE TO SELECT SPECIAL SHANK, THEN SELECT SHANK DESIGNATION BELOW **



Threaded UNF-2A

- 1/4-28
- 5/16-24
- 3/8-24



Zephyr


- 1/4-28
- 10-32



Quick Change



Tri - Flat



Reduced Shank

Tool Specifications: Modify Standard Tool Yes No EDP# _____

Coating: _____ A1: _____ A2: _____

L1: _____ L2: _____ L3: _____ Cutting Non-cutting

L4: _____ D1: _____ D2: _____ D3: _____

D4: _____ OAL: _____

Special Instructions: _____

Standard Tolerances used unless otherwise specified

.x = ± .1

.xx = ± .01

.xxx = ± .005

.xxxx = ± .0005

Fractions = ± 1/64"

Angular = ± 3°